Typography

R RESILIENT TILE
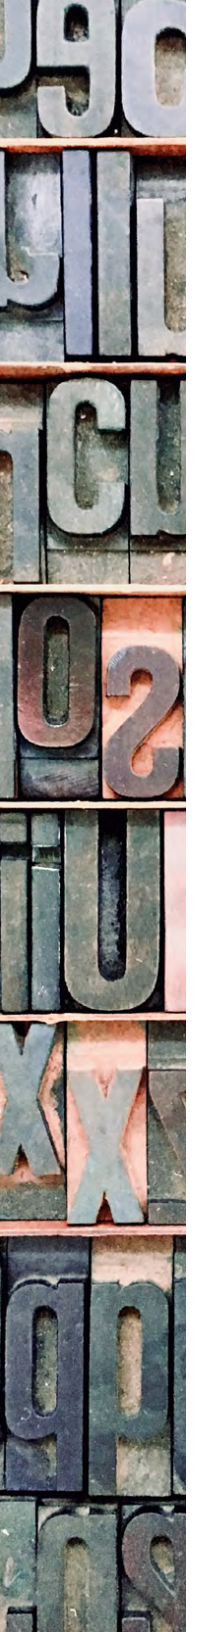
CHARTED / LETTERPRESS / TYPEFACE

LETTERPRESS, TYPEFACE & CHARTED in punctuate

TYPOGRAPHY MAKES THE CASE FOR RESILIENT /

Inspired by the layouts and fonts of newsprint, Patcraft's **TYPOGRAPHY** collection layers subtle pattern, artistic type treatments and line-art mapping to create styles and patterns with universal appeal. Designed in much the same way as a typeface or font family, Typography offers common, baseline features that unite the collection while allowing each pattern to stand on its own or be mixed and matched with others in the collection.

Typography features three styles and numerous color options. *Letterpress* replicates the horizontal and vertical impression of vintage press machines and is available in 18 colors. *Charted* pays homage to mapmaking, and *Typeface* offers a unique visual that resembles strips of newspaper. Both Charted and Typeface are available in 10 colors.

TYPEFACE in exclamation

CHARTED in baseline

LETTERPRESS in ampersand

COLORWAYS 1311V | LETTERPRESS

00100 baseline

00150 apostrophe

00250 character

00300 quote

00380 uppercase

00450 underscore

00480 exclamation

00500 serif

00530 script

00590 asterisks

00630 punctuate

00700 hyphen

00730 tab

00750 ampersand

00770 bracket

00790 italic

00850 shift

00950 hashtag

COLORWAYS   1312V | TYPEFACE

00100 baseline

00250 character

00380 uppercase

00450 underscore

00480 exclamation

00530 script

00630 punctuate

00790 italic

00850 shift

00950 hashtag

COLORWAYS   1313V | CHARTED

00100 baseline

00250 character

00380 uppercase

00450 underscore

00480 exclamation

00530 script

00590 asterisks

00630 punctuate

00850 shift

00950 hashtag
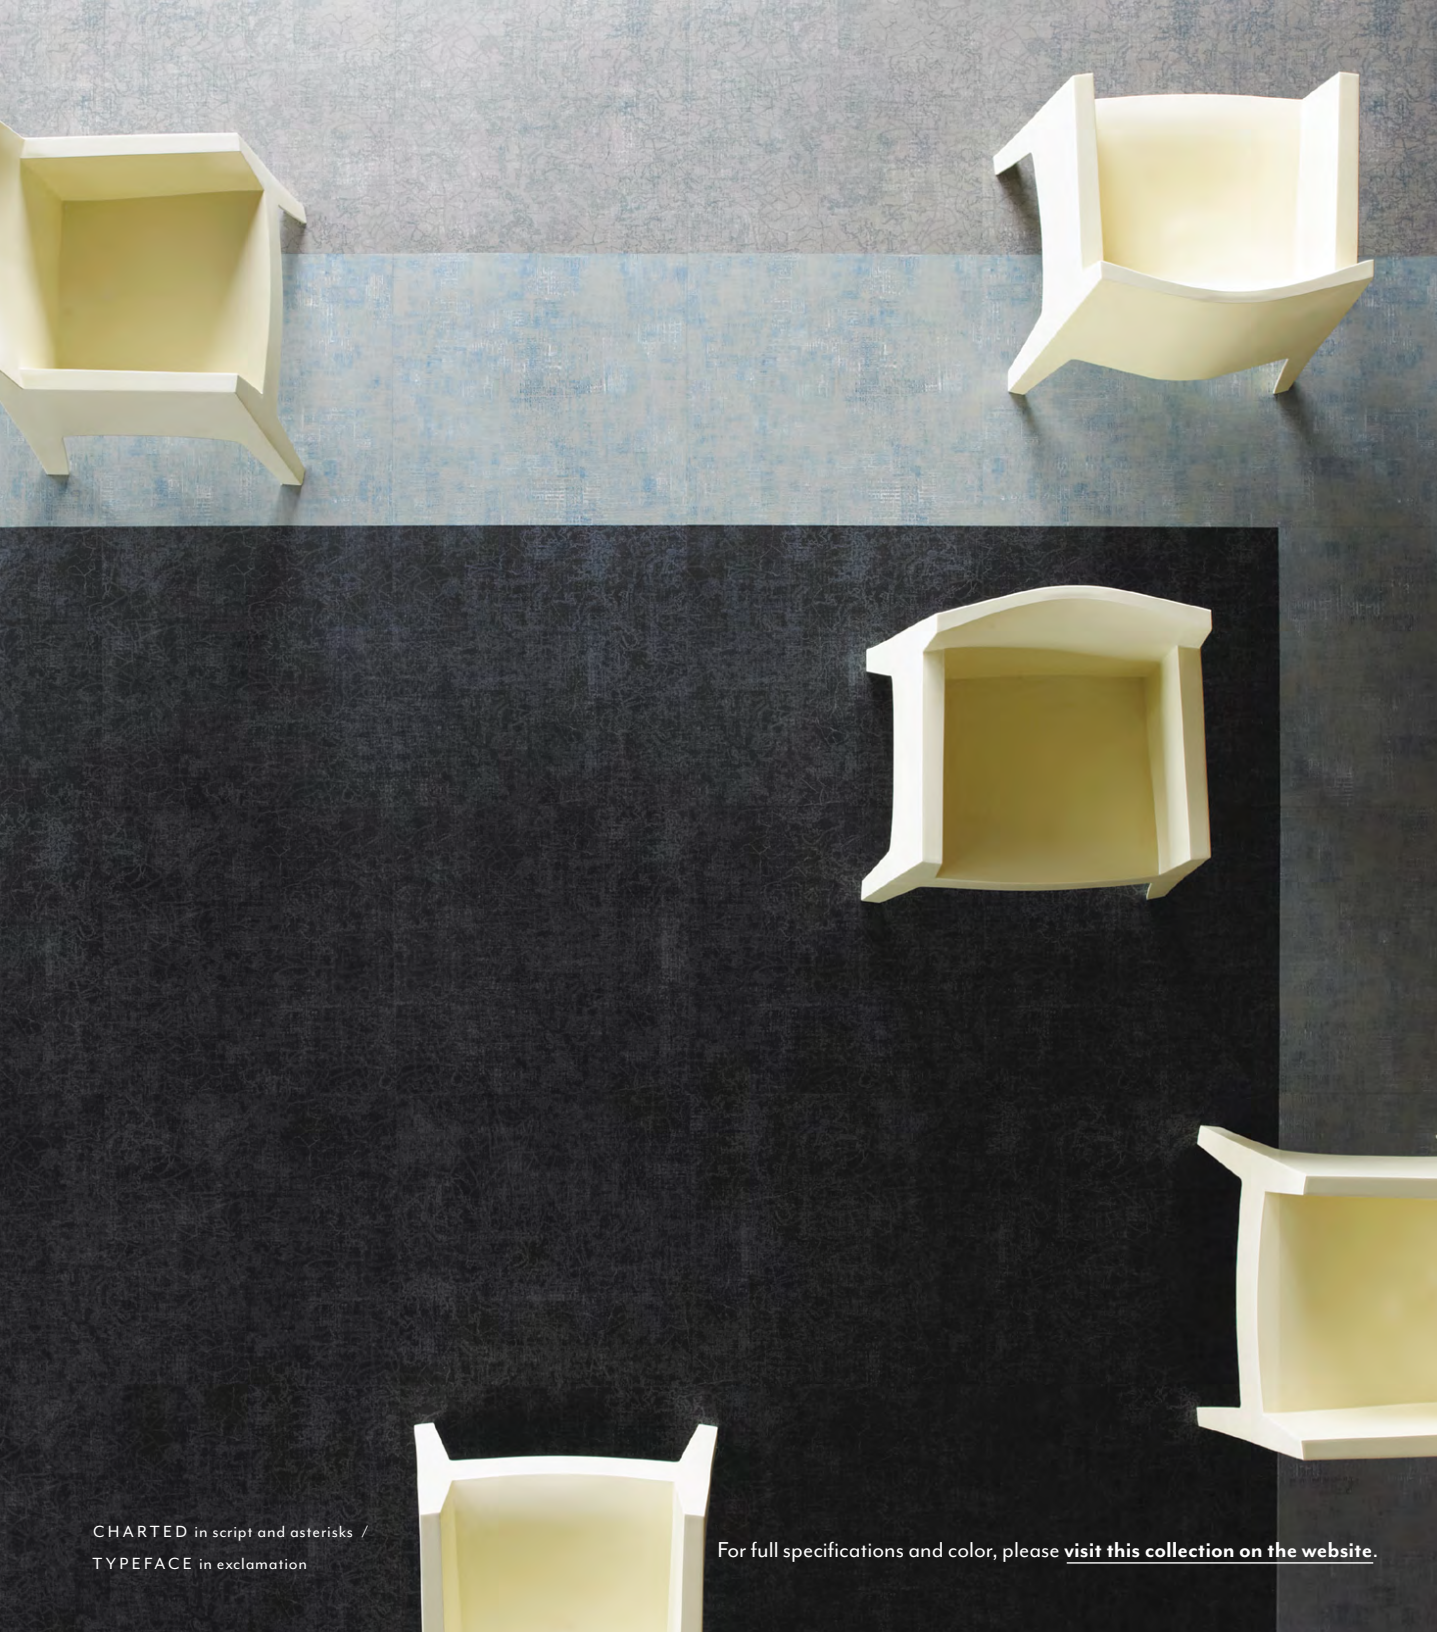
TYPOGRAPHY | resilient tile

CHARTED
style / 313V

—

product size	23.62" x 23.62"	60 cm x 60 cm
construction	commercial luxury vinyl tile
total thickness	.098"	2.5mm
wear layer	.020"	20mil (.5mm)
finish	ExoGuard®
installation	glue down

LETTERPRESS
style / 1311V

—

product size	23.62" x 23.62"	60 cm x 60 cm
construction	commercial luxury vinyl tile
total thickness	.098"	2.5mm
wear layer	.020"	20mil (.5mm)
finish	ExoGuard®
installation	glue down

TYPEFACE
style / 1312V

—

|	
product size	23.62" x 23.62"	60 cm x 60 cm
construction	commercial luxury vinyl tile
total thickness	.098"	2.5mm
wear layer	.020"	20mil (.5mm)
finish	ExoGuard®
installation	glue down

INSTALLATION METHODS

QUARTER TURN

RANDOM

MONOLITHIC

BRICK

CHARTED in script and asterisks /
TYPEFACE in exclamation

For full specifications and color, please **visit this collection on the website**.